

TC

- 46% Poliestere
- 25% Poliuretano
- 21% Poliammide
- 8% Elastam
- Peso: 555 g/m²
- Resistenza all'abrasione:
50.000 cicli Martindale
EN ISO 12947 1-2
- Manutenzione:
lavabile a 30°C,
Stirabile a bassa temperatura

- 46% PL
- 25% PU
- 21% PA
- 8% EA
- Weight: 555 g/m²
- Abrasion resistance:
50.000 rubs Martindale
EN ISO 12947 1-2
- Maintenance:
wash at 30°C, iron at low
temperature

- 46% PL
- 25% PU
- 21% PA
- 8% EA
- Poids: 555 g/m²
- Résistance à l'abrasion:
50.000 tours Martindale
EN ISO 12947 1-2
- Maintenance:
lavable à 30°C, repassage
permi à baisse temperature

- 46% PL
- 25% PU
- 21% PA
- 8% EA
- Gewicht: 555 g/m²
- Scheuerfestigkeit:
50.000 Scheuertouren
Martindale
EN ISO 12947 1-2
- Gebrauchanleitung:
Waschen bei 30°C,
bügeln bei niedriger
Temperatur


- 46% PL
- 25% PU
- 21% PA
- 8% EA
- Peso: 555 g/m²
- Resistencia a la abrasion:
50.000 ciclos Martindale
EN ISO 12947 1-2
- Se puede lavar a 30°C,
planchar con temperatura baja



TC 01



TC 08

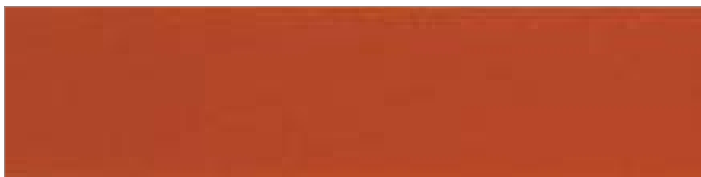

TC 17



TC 02

